EFS750, BORA Ecotube shallow duct with a bar 750 mm

SUTER



Article no. 40.002.050.00 Price CHF 48.- D excl. VAT

Product description

EFS750 BORA Ecotube shallow duct with a bar 750 mm

Technical data

Dimensions (W x D x H) 245 x 750 x 89 mm Material characteristic V0 according to UL94 B1 according to DIN 4102-1 Number of seals required

Weight 1.7 kg Maximum load 125 kg


Planning guidelines

For installation in floor structure For use with units whose duct connection is designed for BORA Ecotube (connection 245 x 89 mm). To connect BORA Ecotube with Naber connections (222 x 89 mm), an adapter (EFA, 40.001.779) is available / can be ordered separately. BORA DUCT SYSTEM & WALL SLEEVE

EFS750/1

BORA Ecotube shallow duct 750mm

BORA Ecotube shallow duct with partition 750mm

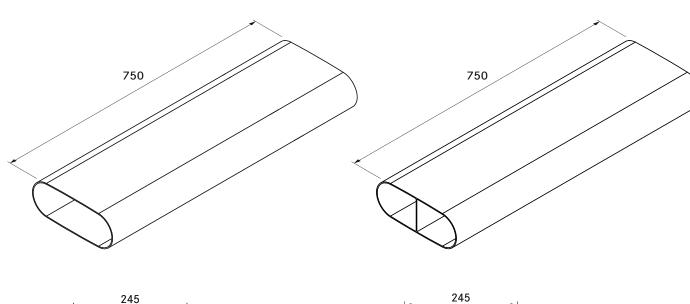





Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.6 kg
Dimensions (WxDxH)	245 x 750 x 89

Product description

- Optimal extraction performance with the lowest possible noise level
- own duct system
- Full flexibility in the exhaust ducting
 100% tight without additional taping
- Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
- Complete BORA system

technical data

2

8

Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.7 kg
Dimensions (WxDxH)	245 x 750 x 89 mm

Product description

- Especially suited for installation in the floor structure
- Optimal extraction performance with the lowest possible noise level
- own duct system
 Full flexibility in the exhaust ducting
- 100% tight without additional taping
 Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
 Complete BORA system