

EFS750, BORA Ecotube shallow duct with a bar 750 mm[> Web link](#)**Article no.**
40.002.050.00**Price CHF**
48.- D excl. VAT**Product description****EFS750 BORA Ecotube shallow duct with a bar 750 mm****Technical data****Dimensions (W x D x H)**

245 x 750 x 89 mm

Material characteristic

V0 according to UL94

B1 according to DIN 4102-1

Number of seals required

-

Weight

1.7 kg

Maximum load

125 kg

Planning guidelines


For installation in floor structure

For use with units whose duct connection is designed for BORA Ecotube (connection 245 x 89 mm). To connect BORA Ecotube with Naber connections (222 x 89 mm), an adapter (EFA, 40.001.779) is available / can be ordered separately.

EF750/1

BORA DUCT SYSTEM &
WALL SLEEVE

BORA Ecotube shallow duct 750mm

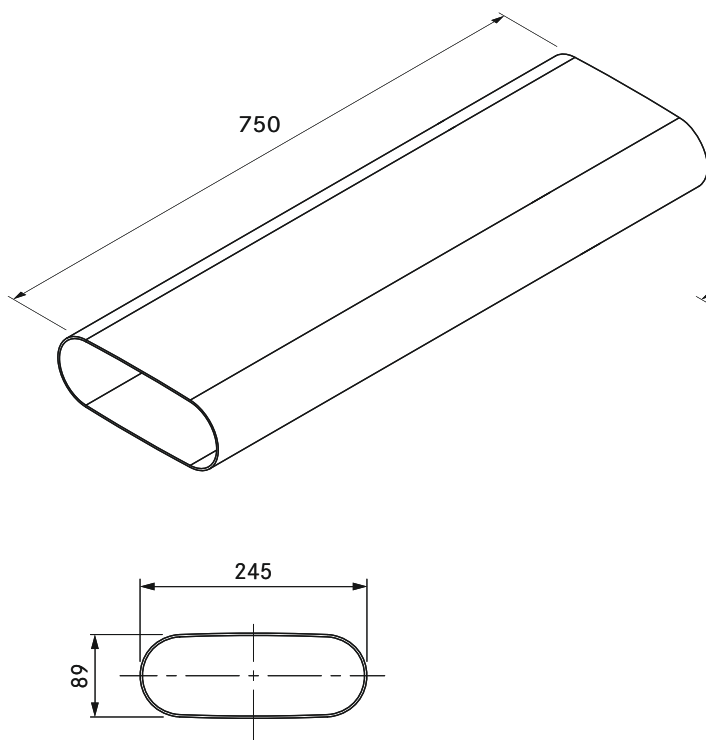

technical data

Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.6 kg
Dimensions (WxDxH)	245 x 750 x 89


Product description

- Optimal extraction performance with the lowest possible noise level
- own duct system
- Full flexibility in the exhaust ducting
- 100% tight without additional taping
- Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
- Complete BORA system

EFS750/1

BORA DUCT SYSTEM &
WALL SLEEVE

BORA Ecotube shallow duct with partition 750mm

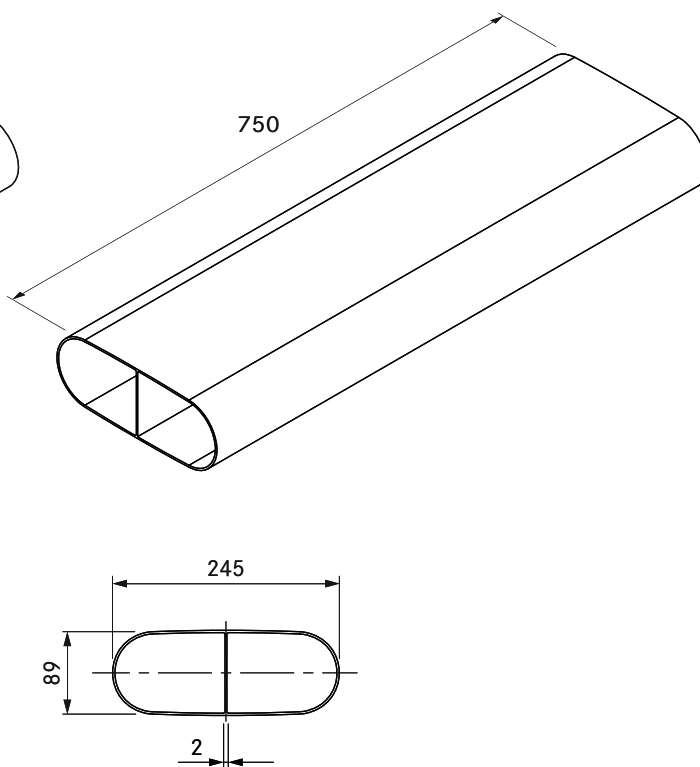

technical data

Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.7 kg
Dimensions (WxDxH)	245 x 750 x 89 mm

Product description

- Especially suited for installation in the floor structure
- Optimal extraction performance with the lowest possible noise level
- own duct system
- Full flexibility in the exhaust ducting
- 100% tight without additional taping
- Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
- Complete BORA system