

## EFS750, BORA Ecotube shallow duct with a bar 750 mm

[> Web link](#)

**Article no.**  
40.002.050.00

**Price CHF**  
48.- D excl. VAT

## Product description

## EFS750 BORA Ecotube shallow duct with a bar 750 mm

## Technical data

## Dimensions (W x D x H)

245 x 750 x 89 mm

## Material characteristic

V0 according to UL94

B1 according to DIN 4102-1

## Number of seals required

-

## Weight

1.7 kg

## Maximum load

125 kg

## Planning guidelines


For installation in floor structure

For use with units whose duct connection is designed for BORA Ecotube (connection 245 x 89 mm). To connect BORA Ecotube with Naber connections (222 x 89 mm), an adapter (EFA, 40.001.779) is available / can be ordered separately.

## EF750/1

BORA DUCT SYSTEM &  
WALL SLEEVE

BORA Ecotube shallow duct 750mm

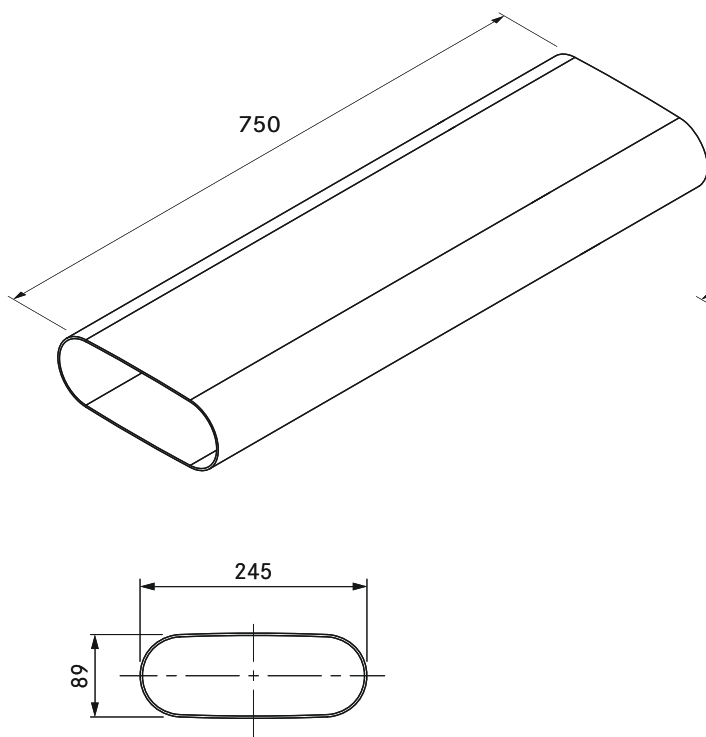

### technical data

Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.6 kg
Dimensions (WxDxH)	245 x 750 x 89


### Product description

- Optimal extraction performance with the lowest possible noise level
- own duct system
- Full flexibility in the exhaust ducting
- 100% tight without additional taping
- Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
- Complete BORA system

## EFS750/1

BORA DUCT SYSTEM &  
WALL SLEEVE

BORA Ecotube shallow duct with partition 750mm

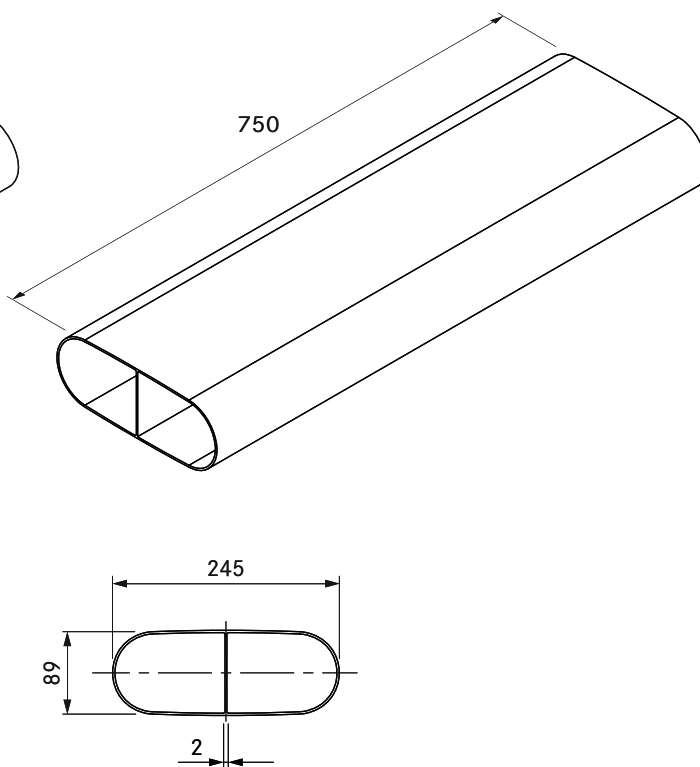

### technical data

Material property	V0 acc. to UL94, B1 acc. to DIN 4102-1
Number of seals required	-
Weight	1.7 kg
Dimensions (WxDxH)	245 x 750 x 89 mm

### Product description

- Especially suited for installation in the floor structure
- Optimal extraction performance with the lowest possible noise level
- own duct system
- Full flexibility in the exhaust ducting
- 100% tight without additional taping
- Fire protection class V0 and material class B1
- Individually shortenable
- Polished inner walls and oval cross section
- Complete BORA system