

## BORA multi drawer MS140

[> Web link](#)

**Model**  
BORA BORA multi drawer MS140

**Manufacturer ID**  
MS140

**Article no.**  
40.002.405.00

**Appliance type**  
Multi drawers

**Construction**  
Euro Norm 60 cm

**VRG**  
5.56

**Price CHF**  
1684.- O excl. VAT

## Highlights

- Intuitive operation - Icon and audio supported touch unit
- Push2Open - Easy opening by gently pressing on the drawer front
- Minimalist design: Flush-integrated surface, Handleless, All Black and consistent to BORA X BO
- Simple cleaning
- Individual control options - operation via presets or manual temperature and time control possible
- BORA Connectivity - expanded operating options and range of functions thanks to networking with BORA X BO
- Best materials: glass fronts and bases/refined metal components/quality/ durability

## Product description

Type: **Euro standard 60 cm**  
GTIN no.: **4251731203192**

## Technical data

Supply voltage 230 V  
Frequency 50 Hz  
Maximum power consumption 810 W  
Minimum fuse protection 1 x 16 A  
Dimensions (width x depth x height) 559 x 537 x 140 mm  
Dimensions oven chamber (width x depth x height) 525 x 410 x 97 mm  
Oven chamber volume 20 l  
Maximum loading weight 25 kg  
Weight (incl. accessories/packaging) 19,2 kg  
Weight 16,4 kg  
Time stages 1 - 6  
Temperature levels 1 - 6  
Temperature control range 30 - 100 °C  
Power supply cable length 1,8 m  
Power supply cable type Typ 23, 16A / C13

## Scope of delivery


BORA multi drawer MS140  
Power supply cable  
Communication cable  
5 pairs of decore side frames (different widths)  
Installation accessories  
Sealing lip  
Operating and installation instructions

## Product- and planning instructions

Other built-in appliances with a total weight of up to 105 kg can be placed directly on top of the multi-drawer.  
The construction base must be permanently installed and designed to withstand the appliances' weight.  
The back panel of the kitchen unit must not be fitted behind the appliance.  
Not compatible with BORA multi drawer level grate MSER.

**BORA multi drawer MS140**[> Web link](#)**Accessory**You can find the complete range of accessories here [> Weblink](#)

Optional accessories






40.002.410.00 / CHF  
105.-  
BORA glass front  
MSF140, 140mm, for  
multi drawer MS140

**Compatible Articles**

40.002.392.00 / CHF  
6795.-  
BORA X BO steam oven

# MS140

BORA multi drawer 140mm

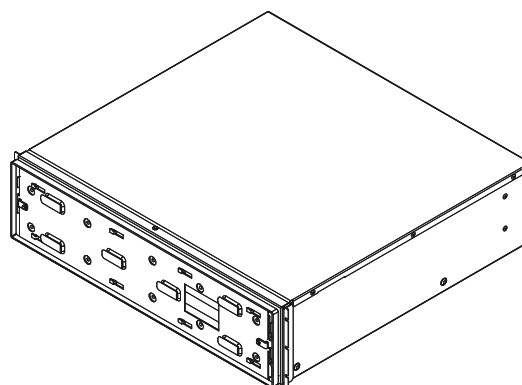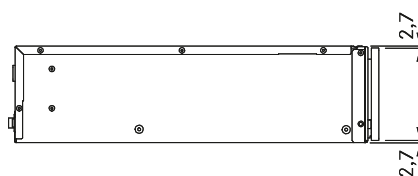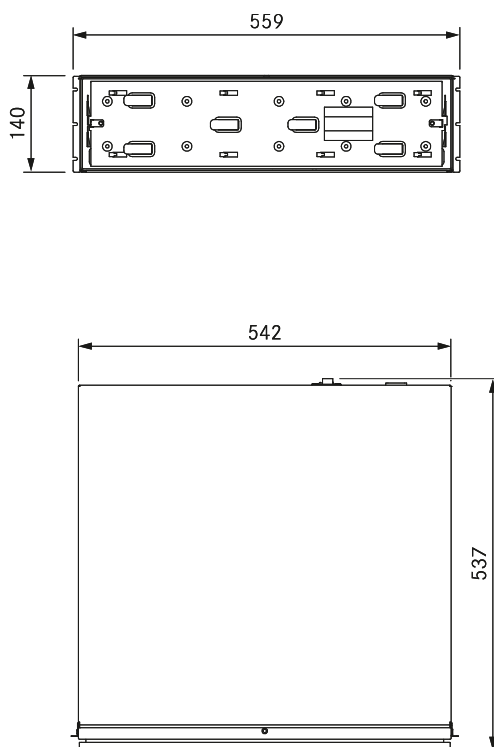

## Technical data

Supply voltage	220 – 240 V
Frequency	50 / 60 Hz
Maximum power consumption	810 W
Minimum fuse protection	1 x 16 A
Dimensions (width x height x depth)	559 x 140 x 537 mm
Dimensions oven chamber (width x height x depth)	525 x 97 x 410 mm
Oven chamber volume	20 l
Maximum loading weight	25 kg
Weight (incl. accessories/packaging)	19,2 kg
Weight	16,4 kg
Time stages	1 – 6
Temperature levels	1 – 6
Temperature control range	30 – 100 °C
Power supply cable length	1,8 m
Power supply cable type	C13 / E + F

## Product description

- Best performance
- Best materials: glass fronts and bases/refined metal components/quality/durability
- Touchdisplay/Soundfeedback/Icons
- Minimalist design: Flush-integrated surface, Handleless, All Black and consistent to BORA X BO
- Push 2 Open
- Simple cleaning
- Individual control options – operation via presets or manual temperature and time control possible
- BORA Connectivity – expanded operating options and range of functions thanks to networking with BORA X BO

## Scope of delivery

- Multi drawer 140mm MSF140
- Power supply cable with type E + F plugs
- Communication cable
- 5 pairs of decore side frames (different widths)
- Installation accessories
- Sealing lip
- operating and installation instructions

## Accessories

- multi drawer glass front 140mm MSF140
- multi drawer type G power supply cable MSNLG (UK, IE)
- multi drawer type J power supply cable MSNLJ (CH)

## Product- and planning instructions

- Other built-in appliances with a total weight of up to 105 kg can be placed directly on top of the multi-drawer.
- The construction base must be permanently installed and designed to withstand the appliances' weight.
- The back panel of the kitchen unit must not be fitted behind the appliance.