SUTER

> Web link

BORA multi drawer MSS290, set MS290 & MSF290



Model

BORA BORA multi drawer MSS290, set MS290 & MSF290 Manufacturer ID MSS290

Article no. 40.002.408.00 Appliance type Multi drawers Construction Euro Norm 60 cm VRG 5.56 Price CHF 1994.- O excl. VAT

Highlights

- Room to cook: storage space, load capacity and divisible organisation elements
- Intuitive operation Icon and audio supported touch unit
- Push2Open Easy opening by gently pressing on the drawer front
- Minimalist design: Flush-integrated surface, Handleless, All Black and consistant to BORA X BO
- Simple cleaning
- Individual control options operation via presets or manual temperature and time control possible
- BORA Connectivity expanded operating options and range of functions thanks to networking with BORA X BO
- Best materials: glass fronts and bases/refined metal components/quality/ durability

Product description

Type: Euro standard 60 cm GTIN no.: 4251731204427

Technical data

Supply voltage 230 V Frequency 50 Hz Maximum power consumption 810 W Minimum fuse protection 1 x 16 A Dimensions (width x depth x height) 595 x 541 x 290 mm Dimensions oven chamber (width x depth x height) 525 x 410 x 247 mm Oven chamber volume 50 I Maximum loading weight 25 kg Weight (incl. accessories/packaging) 27,6 kg Weight 23,9 kg Time stages 1 - 6 Temperature levels 1 - 6 Temperature levels 1 - 6 Temperature control range 30 - 100 °C Power supply cable length 1,8 m Power supply cable type Typ 23, 16A / C13

Scope of delivery

BORA multi drawer MS290 BORA glass front MSF290, 290 mm BORA multi drawer level-grid MSER Power supply cable Communication cable 5 pairs of decore side frames (different widths) Installation accessories Sealing lip Operating and installation instructions

Product- and planning instructions

Other built-in appliances with a total weight of up to 105 kg can be placed directly on top of the multi-drawer. The construction base must be permanently installed and designed to withstand the appliances' weight. The back panel of the kitchen unit must not be fitted behind the appliance. Up to 2 shelf racks can be used in the multi-drawer.



> Web link


BORA multi drawer MSS290, set MS290 & MSF290


Compatible Articles



40.002.392.00 / CHF 6795.-BORA X BO steam oven

MSS290 BORA Multischublade Set 290mm inkl. Glasfront (1x MS290, 1x MSF290)





Technische Daten

Anschlussspannung	220 - 240 V
Frequenz	50 / 60 Hz
Leistungsaufnahme maximal	810 W
Absicherung	1 x 16 A
Abmessungen (Breite x Höhe x Tiefe)	595 x 541 x 292 mm
Abmessung Garraum (Breite x Höhe x Tiefe)	525 x 247 x 410 mm
Garraumvolumen	50
Maximales Beladungsgewicht	25 kg
Gewicht (inkl. Zubehör/Verpackung)	27,6 kg
Gewicht	23,9 kg
Zeitstufen	1 - 6
Temperaturstufen	1 - 6
Temperaturregelbereich	30 - 100 °C
Netzanschlussleitung Steckertyp	C13 / E + F
Länge Netzanschlussleitung	1,8 m

- Produktbeschreibung Komfort Stauraum & Traglast großzügig ausgelegt
- Beste Materialien
- Intuitive Bedienung Icon- und Audio unterstützte Touch-Einheit

- Beste Performance
 Push2Open Einfaches Öffnen durch sanftes Drücken auf die Schubladenfront
 Minimalistisches Design Flächenbündig, Grifflos, All Black und einheitlich zu BORA X BO
- Leichte Reinigung
- Individuelle Bedienoptionen Bedienung über Voreinstellungen oder manuelle Temperatur- und Zeitregelung möglich
- BORA Connectivity Erweiterte Bedienmöglichkeiten und Funktionsumfang durch Vernetzung zu BORA X BO
- Spülmaschinenfester Ebenen-Rost

Lieferumfang • Multischublade 290 mm MS290

~

- Multischublade Glasfront 290 mm
- Ebenen-Rost
- Netzanschlussleitung mit Stecker Typ E + F
- 5 Paar Dekorseitenleisten (verschiedene Breiten)
- Montagezubehör

290

• Dichtlippe Bedienungs- und Montageanleitung


Zubehör


- Multischublade Ebenen-Rost MSER
- Multischublade Glasfront 290mm MSF290
- Multischublade Netzanschlussleitung Typ G MSNLG (UK, IE)
- Multischublade Netzanschulussleitung Typ J MSNLJ (CH)

Produkt- und Planungshinweise

- Weitere Einbaugeräte mit einem Gesamtgewicht bis zu 105 kg können direkt auf die Multischublade gestellt werden.
- Der Konstruktionsboden muss fest verbaut und für das Gewicht der Geräte ausgelegt sein.
- Hinter dem Gerät darf keine Korpusrückwand montiert sein.
- Es können bis zu 2 Ebenen-Roste in die Multischublade eingesetzt werden.


BORA multi drawer 290mm





Technical data

Supply voltage	220 - 240 V
Frequency	50 / 60 Hz
Maximum power consumption	810 W
Minimum fuse protection	1 x 16 A
Dimensions (width x height x depth)	559 x 290 x 537 mm
Dimensions oven chamber (width x height x depth)	525 x 247 x 410 mm
Oven chamber volume	50
Maximum loading weight	25 kg
Weight (incl. accessories/packaging)	24 kg
Weight	20,7 kg
Time stages	1 - 6
Temperature levels	1 – 6
Temperature control range	30 - 100 °C
Power supply cable length	1,8 m
Power supply cable type	C13 / E+F

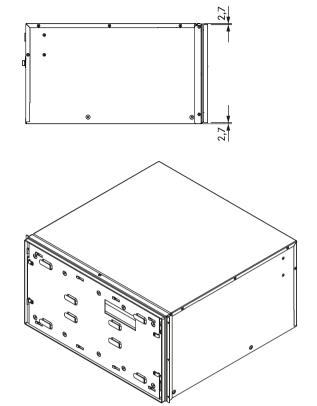

Product description

- Best performance • Best materials: glass fronts and bases/refined metal components/quality/ durability
- Touchdisplay/Soundfeedback/Icons
- Minimalist design: Flush-integrated surface, Handleless, All Black and consistant to BORA X BO
- Push 2 Open
- · Simple cleaning
- Room to cook: storage space/load capacity/divisible organisation elements
- Individual control options operation via presets or manual temperature and time control possible
- · BORA Connectivity expanded operating options and range of functions thanks to networking with BORA X BO • Dishwasher-safe shelf rack

Scope of delivery

- Multi drawer 290mm MS290
- Level-grid
- Power supply cable with type E + F plugs
- Communication cable
- 5 pairs of decore side frames (different widths)
- Installation accessories
- Sealing lip · operating and installation instructions

Accessories

- Multi drawer level-grid MSER
 Multi drawer glass front 290mm MSF290
 Multi drawer power supply cable type G MSNLG (UK, IE)
 Multi drawer power supply cable type J MSNLJ (CH)
- Product- and planning instructions
- Other built-in appliances with a total weight of up to 105 kg can be placed directly on top of the multi-drawer.
- The construction base must be permanently installed and designed to withstand the appliances' weight.
- The back panel of the kitchen unit must not be fitted behind the appliance
- Up to 2 shelf racks can be used in the multi-drawer.